

Breakout Cable Order Form

CUSTOMER:

COMPANY:

QTY:

 C1 PART # **B**
 SECTION # | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |

SIDE A SPECS
SECTION 1:

 MM=MULTIMODE
 SM=SINGLEMODE
 (CHOOSE IN SEC.9)

SIDE A | CONNECTOR TYPE

A = 12F MTP-FEMALE	MM=UPC SM=APC
B = 12F MTP-MALE	MM=UPC SM=APC
C = 24F MTP-FEMALE	MM=UPC SM=APC
D = 24F MTP-MALE	MM=UPC SM=APC
E = 8 MTP(QSFP)-FEMALE	MM=UPC SM=APC
F = 8 MTP(QSFP)-MALE	MM=UPC SM=APC
G = 20 MTP(CFP)-FEMALE	MM=UPC SM=APC
H = 20 MTP(CFP)-MALE	MM=UPC SM=APC

SECTION 2:
SIDE A | CONNECTOR POLISH

P = PC	F = FLAT
U = UPC	
A = APC	

NOTES & INSTRUCTIONS:
SIDE B SPECS
SECTION 3:

 MM=MULTIMODE
 SM=SINGLEMODE
 (CHOOSE IN SEC.8)

SIDE B | CONNECTOR TYPE

A = 12F MTP-FEMALE	MM=UPC SM=APC
B = 12F MTP-MALE	MM=UPC SM=APC
E = 8 MTP(QSFP)-FEMALE	MM=UPC SM=APC
F = 8 MTP(QSFP)-MALE	MM=UPC SM=APC
L = LC SIMPLEX	MM=UPC or PC SM=UPC or APC
M = LC DUPLEX	MM=UPC or PC SM=UPC or APC
N = LC UNIBOOT SIMPLEX	MM=UPC or PC SM=UPC or APC
O = LC UNIBOOT DUPLEX	MM=UPC or PC SM=UPC or APC
P = SC SIMPLEX	MM=UPC or PC SM=UPC or APC
Q = SC DUPLEX	MM=UPC or PC SM=UPC or APC
R = ST SIMPLEX	MM=UPC SM=APC
S = ST DUPLEX	MM=UPC SM=APC
T = FC SIMPLEX	MM=UPC SM=APC
U = FC DUPLEX	MM=UPC SM=APC
Y = NO CONNECTOR	
Z = MIXED CONNECTORS	PROVIDE DETAILS IN NOTES

SECTION 4:
SIDE B | CONNECTOR POLISH

P = PC	F = FLAT
U = UPC	
A = APC	

SECTION 5:
SIDE B | BREAKOUT LENGTH

_ _ " = 2 DIGIT LENGTH IN INCHES

 NOTES: STANDARD BREAKOUT LENGTH IS 18"
 LENGTHS CAN BE BETWEEN 01" - 99"

SECTION 6:
SIDE B | BREAKOUT STAGGER LENGTH

_ = 1 DIGIT STAGGER LENGTH IN INCHES

 NOTES: FOR NO STAGGER INPUT 0"
 STANDARD STAGGER LENGTH IS 1.0"
 LENGTHS CAN BE BETWEEN 1" - 9"

SECTION 7:
SIDE B | FURCATION THICKNESS

A = 900 mic UNFURCATED	FOR: LCs & SCs
B = 2mm	FOR: LCs & MTPs w/low fiber#
C = 3mm	FOR: SCs, STs & MTPs w/high fiber#

PRIMARY CABLE SPECS
SECTION 8:
FIBER TYPE

1 = MULTIMODE OM1	2 = MULTIMODE OM2
3 = MULTIMODE OM3	4 = MULTIMODE OM4
5 = SINGLEMODE OS2	6 = MULTIMODE OM4 +
7 = MULTIMODE OM5	

SECTION 9:
FIBER COUNT

04 = 4 FIBER	06 = 6 FIBER
08 = 8 FIBER	12 = 12 FIBER
20 = 20 FIBER	24 = 24 FIBER

_ _ = OTHER ADD ANY 2 DIGIT FIBER COUNT INTO PART# UP TOP

SECTION 10:
POLARITY

A = TYPE A	MTP
B = TYPE B	MTP
C = TYPE C	MTP
D = UNIVERSAL/CORNING	MTP (QSFP & CFP)
E = A-B	NON-MTP CONNECTORS (STANDARD)
F = A-A	NON-MTP CONNECTORS
G = OTHER	PROVIDE DETAILS IN NOTES

SECTION 11:
CABLE TYPE

A = INDOOR	B = LOOSE TUBE INDOOR
C = OUTDOOR	D = LOOSE TUBE OUTDOOR

SECTION 12:
JACKET TYPE (FLAME RATING)

A = PLENUM (STANDARD OM4, OM4+, OM5)
B = RISER
E = LOW SMOKE ZERO HALOGEN (LSZH)
C = ARMOR PLENUM
D = ARMOR RISER
E = ARMOR LOW SMOKE ZERO HALOGEN (LSZH)

SECTION 13:
CABLE LENGTH - IN (M)ETERS OR (F)EET

_ _ _ _ M F = 4 DIGITS +(M)ETERS or (F)EET

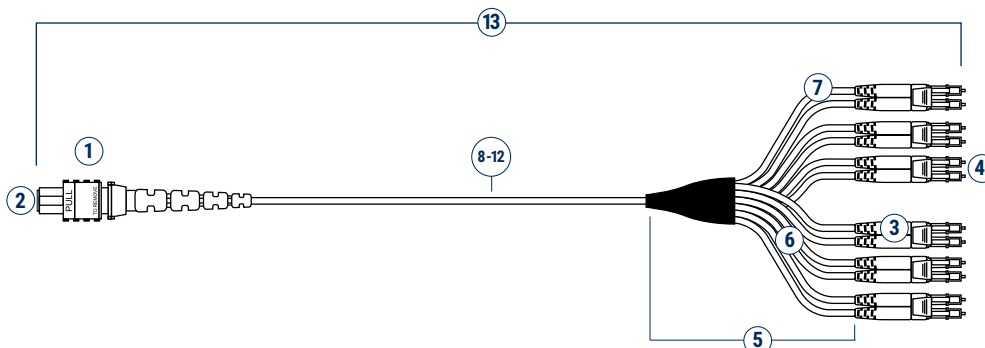
 NOTES: 4TH DIGIT CAN ONLY END IN .0 or .5 .0 = EXACT FOOT OR
 METER or .5 = HALF FOOT OR METER

SECTION 14:
PULLING AND MTP TABS

A = NONE	B = TAB ONLY
C = PULLING EYE (INDOOR)	D = TAB W/EYE
E = PULLING MESH (OUTDOOR)	F = TAB W/MESH

SECTION 15:
LABELING

N = NO	
S = YES - STANDARD	SEE BELOW FOR DETAILS
C = YES - CUSTOM	FILL OUT FORM ON NEXT PAGE

STANDARD LABEL PACKAGE INCLUDES:
 BAG = LOGO AND PART #


CUSTOM LABEL SPECS

**CUSTOM LABEL SECTION - FILL OUT ONLY IF "C - CUSTOM " IS ENTERED FOR SEC 11
 PROVIDE LABELS ON (CHOOSE ALL THAT APPLY)**

YES | NO

B = CABLE BAG

U = CABLE UNIT

CABLE BAG - COMPLETE IF CHOSEN ABOVE

CABLE BAG OPTIONS - CHOOSE ALL THAT APPLY

YES | NO

LOGO - IF YES SELECTED CHOOSE 1 LOGO BELOW

CUSTOMER'S CHAMPION ONE

PART NUMBER

LENGTH

RACK/SWITCH : _____

OTHER : _____

CABLE UNIT - COMPLETE IF CHOSEN ABOVE

LABEL STYLE

W = WRAP LABEL or **F** = FLAG LABEL

UNIT LABEL OPTIONS - CHOOSE ALL THAT APPLY

YES | NO

LOGO - IF YES SELECTED CHOOSE 1 LOGO BELOW

CUSTOMER'S CHAMPION ONE

PART NUMBER

LENGTH

OTHER : _____